



Omega J1065S

CRUSHING & SCREENING

STATIC

Feeder

Width	940 mm (0.94 m)
Type	Vibrating feeder tray
Control	Variable speed

Hopper

Width	2500 mm
Length:	4200 mm
Hopper capacity	4.1 m ³

Crusher

Crusher type	Omega 1065 single toggle
Crusher opening	40" x 26" / 1000 mm x 650 mm
Max feed	21" / 530 mm
CSS range	2" - 5" / 130 mm - 50 mm
Motor	90 kW
Adjustment type	Hydraulic wedge
Auto control	Chamber level sensor
Jaw speed	Adjustable 280-300 rpm
Chamber construction	Bolted
Jaw reverse feature	

Product conveyor

Width	900 mm (0.9 m)
Speed	87 m / m
Stockpile height	4000 mm

Weight

25,000 kg

* Details may change on final Specification

Contact us:

Unit 10a, Enterprise Park, Drumquin Rd, Castlederg,
Co. Tyrone, N. Ireland, BT81 7PX

T. +44 28 8167 8571 E. info@omegacrusher.com

omegacrusher.com

Omega

CRUSHING & SCREENING

J1065S

STATIC



eco drive


HIGH OUTPUT CAPACITY

EFFICIENT ELECTRIC DRIVE

MODULAR DESIGN

FITS IN CONTAINER FOR SHIPPING



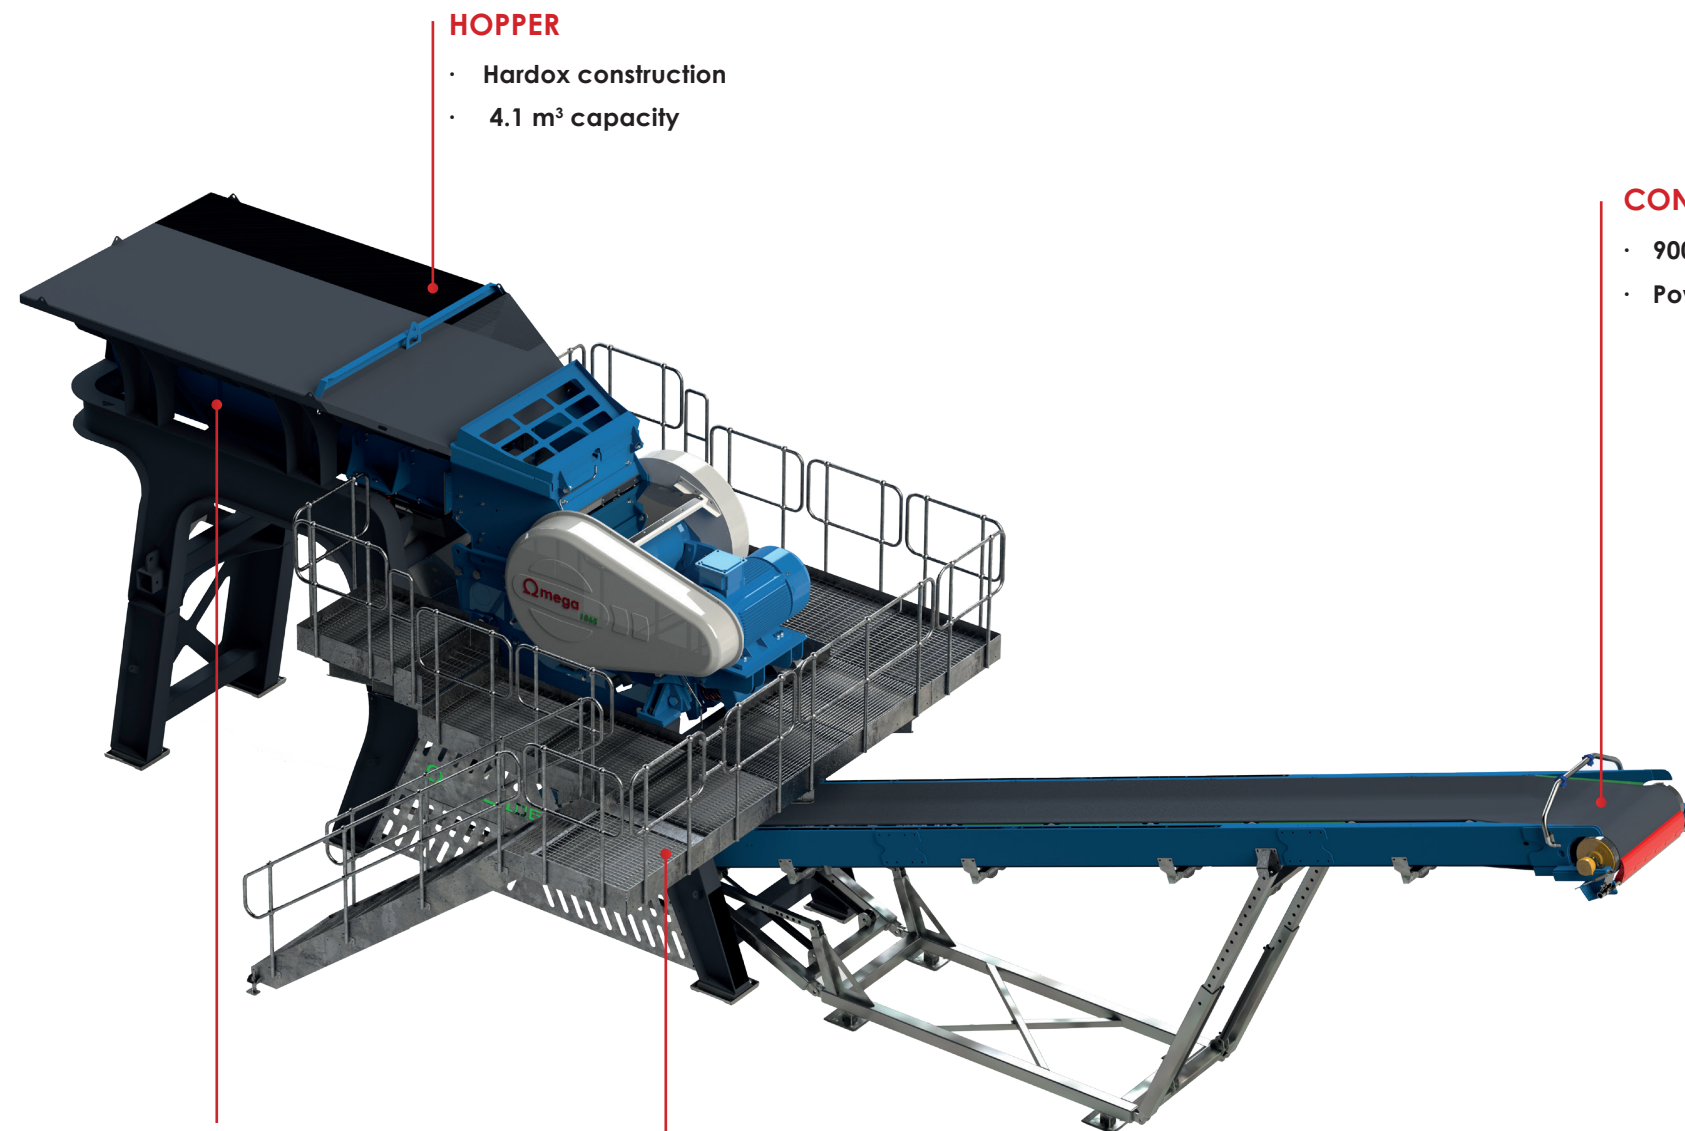

HOPPER

- Hardox construction
- 4.1 m³ capacity

CONVEYOR

- 900 mm wide
- Powerful motorised head drum pulley

VIBRATING FEEDER

- 940 mm wide
- Declined feeder to assist material flow
- Stepped grizzly section
- Hardox lined wear plates
- Stepped grizzly section

FLOWFORGE FLOORING

- Galvanised walkway and handrails

Multiple Jaw die options

Weg motor electric drive via v-belt

Heavy duty shaft installed with premium bearings

Large 1000 mm x 650 mm feed opening

Large Jaw ejector cylinder



Hydraulic wedge for CSS adjust (50 - 130 mm)

Draw-back system for simplicity

Bolted mainframe for strength and durability



Optional deflector plate for recycling applications

TRANSPORT DIMENSIONS

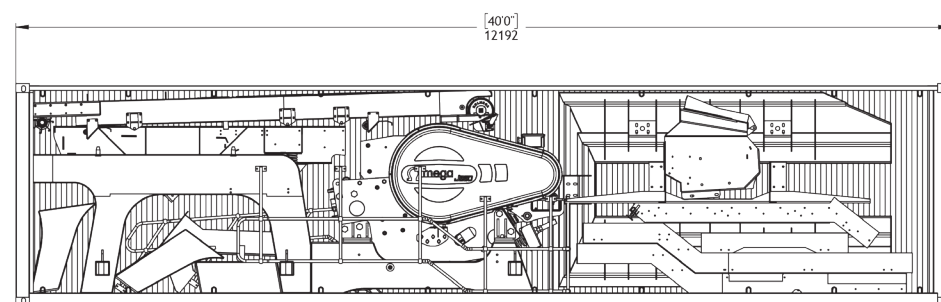

H. 9' 6" / 2900 mm **W.** 8' 00" / 2500 mm **L.** 40' 0" / 12,200 mm **WEIGHT.** 25,000 kg

WORKING DIMENSIONS

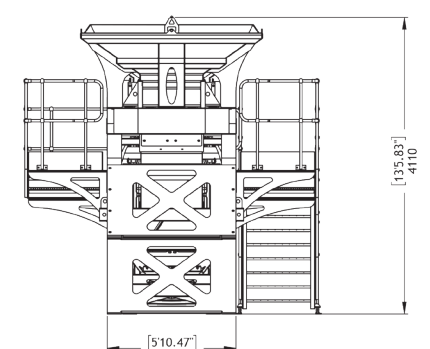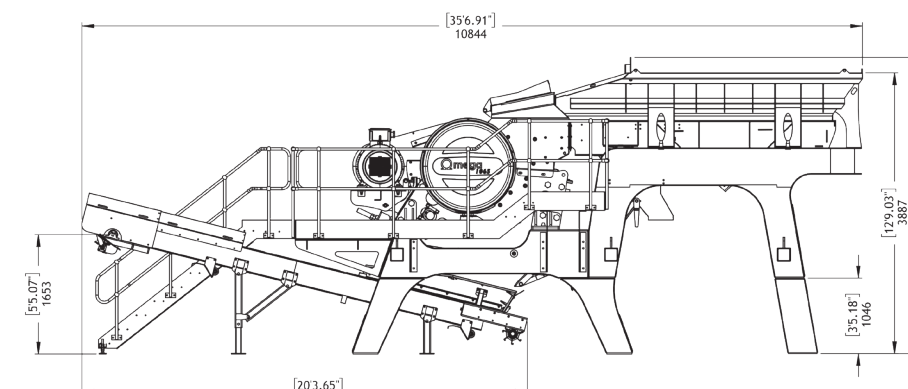

H. 13'5.83" / 4650 mm **W.** 13'4.54" / 4100 mm **L.** 35'6.91" / 10,800 mm **WEIGHT.** 25,000 kg