



omegacrusher.com

Omega J1065M

CRUSHING & SCREENING MOBILE

Hopper

Type	Fixed
Length	14' / 4270 mm
Height	3' 5" / 1030 mm
Capacity	4.1 m ³
Material type	hardox

Crusher

Type	Omega 1065 single toggle
Opening size	40" x 26" / 1000 mm x 650 mm
Max feed	21" / 530 mm
CSS Range	2" - 5" / 50 mm - 130 mm
Motor type	90 kW

Powerpack

Type	Stage V
Power output	220 kVA

Product conveyor

Discharge height	11' 11" / 3626 mm
Belt width	35.5" / 900 mm
Drive type	Motorised pulley, 7.5 kW

Fines conveyor

Discharge height	10' 4" / 3140 mm
Belt width	25.6" / 650 mm
Drive type	Motor / Gearbox, 2.2 kW

* Details may change on final Specification

Contact us:

Unit 10a, Enterprise Park, Drumquin Rd, Castlederg,
Co. Tyrone, N. Ireland, BT81 7PX

T. +44 28 8167 8571 E. info@omegacrusher.com

Omega

CRUSHING & SCREENING

J1065M

MOBILE

ALL ELECTRIC DRIVE

USER-FRIENDLY NO PLC

QUARRY OR RECYCLING APPLICATIONS

DUAL POWER



eco drive



HOPPER

- Hardox construction
- 4.1 m³

VIBRATING FEEDER

- 940 mm wide vibrating feeder
- Declined feeder to assist material flow
- Hardox lined
- Stepped grizzly section
- Operator remote control on/off

POWERPACK

- Emmision compliant engine
- Grid plug in option

DISCHARGE CONVEYOR

- 900 mm wide belt
- 3626 mm discharge height
- Overband magnet
- Hydraulic folding
- Self-cleaning spoke tail drum

Heavy duty shaft installed with premium bearings

Large 1000 mm x 650 mm feed opening

Large Jaw ejector cylinder

90 kW motor electric drive via v-belt

Multiple Jaw die options

Hydraulic wedge for CSS adjust (50 mm - 130 mm)


Draw-back system for simplicity

Optional deflector plate for recycling applications

FINES CONVEYOR


- 650 mm wide belt
- 3140 mm discharge height
- Self-cleaning spoke tail drum

TRANSPORT DIMENSIONS

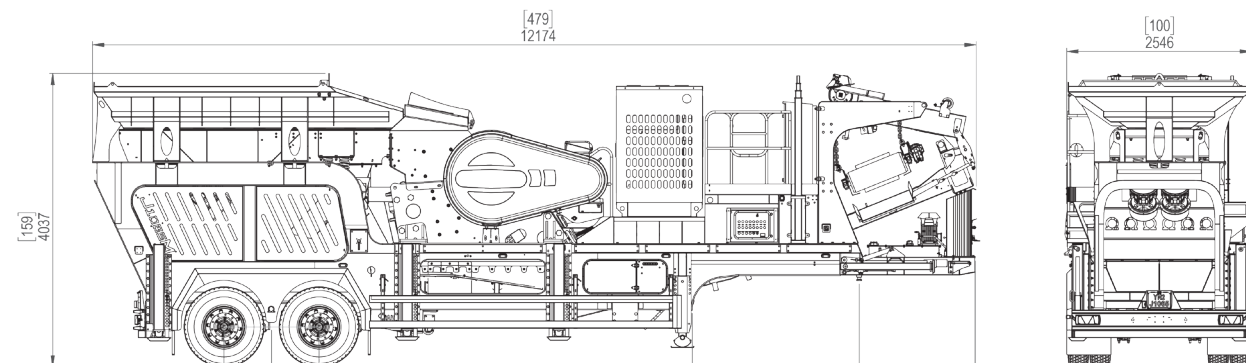

H. 13' 3" / 4037 mm **W.** 8' 5" / 2550 mm **L.** 39' 11" / 12,174 mm **WEIGHT.** 31,500 kg

WORKING DIMENSIONS

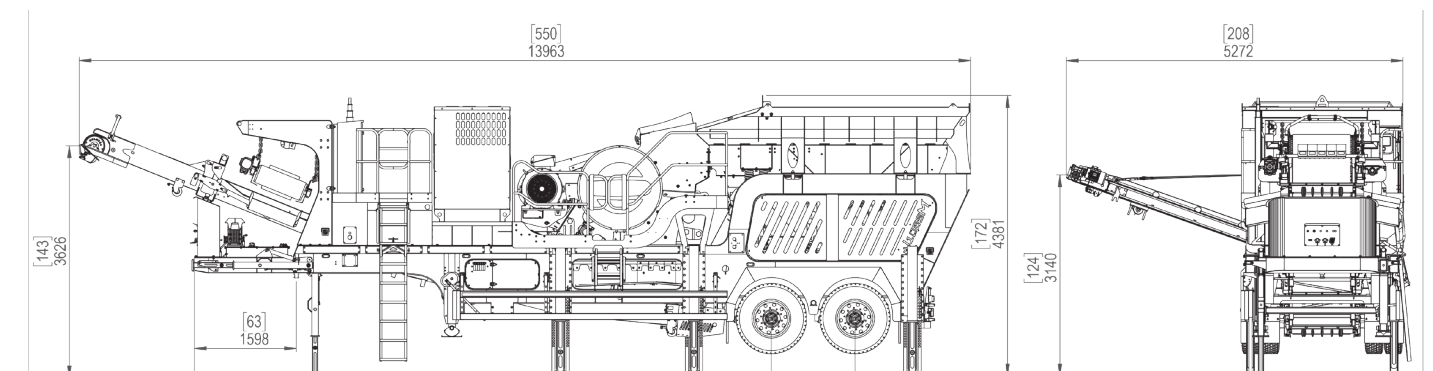

H. 14' 4" / 4380 mm **W.** 17' 4" / 5280 mm **L.** 45' 10" / 13,970 mm **WEIGHT.** 31,500 kg