



Ωmega J1065M

Hopper

Type	Fixed
Length	4275 mm
Height	1030 mm
Capacity	4.1 m ³
Hardox lined	8 mm

Crusher

Type	Omega 1065 single toggle
Opening size	40" x 26" / 1000 mm x 650 mm
Max feed	21" / 530 mm
CSS Range	2" - 5" / 130 mm - 50 mm
Motor type	90 kW

Engine

Type	Stage 5, Stage 3
Power output	220 kVA

Fines Conveyor

Discharge height	9' 12" / 3042 mm
Belt width	27.5" / 700 mm
Drive type	Motor / Gearbox, 2.2 kW

Discharge Conveyor

Discharge height	11' 5" / 3466 mm
Belt width	35.5" / 900 mm
Drive type	Motorised pulley, 7.5 kW

* Details may change on final Specification

Contact us:

Unit 10a, Enterprise Park, Drumquin Rd, Castlederg,
Co. Tyrone, N. Ireland, BT81 7PX

T. +44 28 8167 8571 E. info@omegacrusher.com

Ωmega J1065M

MOBILE

ALL ELECTRIC DRIVE

USER-FRIENDLY NO PLC

QUARRY OR RECYCLING APPLICATIONS

DUAL POWER



HOPPER

- Hardox construction
- 4.1 m³

VIBRATING FEEDER

- 940 mm wide vibrating feeder
- Declined feeder to assist material flow
- Hardox lined
- Stepped grizzly section
- Operator remote control on/off

POWERPACK

- Emmision compliant engine
- Grid plug in option

DISCHARGE CONVEYOR

- 900 mm wide belt
- 3466 mm discharge height
- Overband magnet
- Hydraulic folding
- Self-cleaning spoke tail drum

Heavy duty shaft installed with premium bearings

Large 1000 mm x 650 mm feed opening

Large Jaw ejector cylinder

90 kW motor electric drive via v-belt

Multiple Jaw die options

Hydraulic wedge for CSS adjust (50 mm - 130 mm)


Draw-back system for simplicity

Optional deflector plate for recycling applications

FINES CONVEYOR


- 700 mm wide belt
- 3042 mm discharge height
- Self-cleaning spoke tail drum

TRANSPORT DIMENSIONS

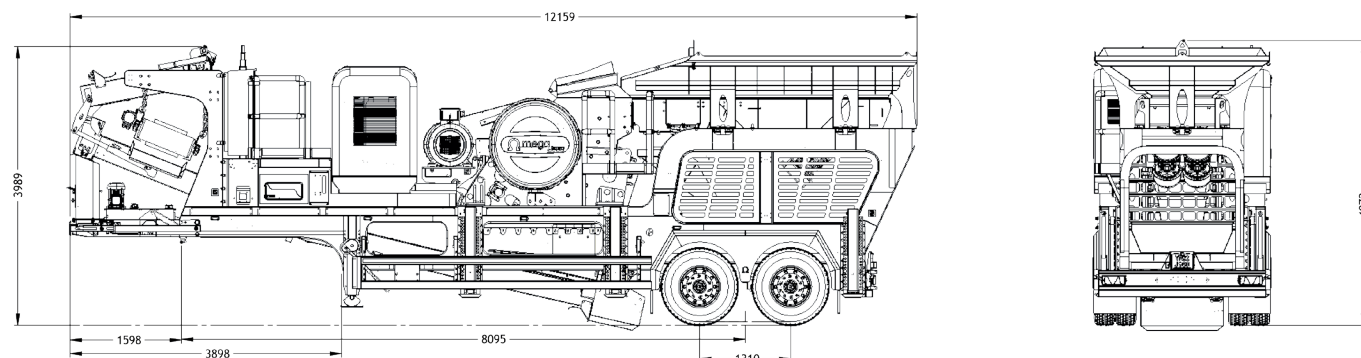

H. 13' 4" / 4,072 mm **W.** 8' 5" / 2,550 mm **L.** 39' 10" / 1,2159 mm **WEIGHT.** 32,000 kg's

WORKING DIMENSIONS

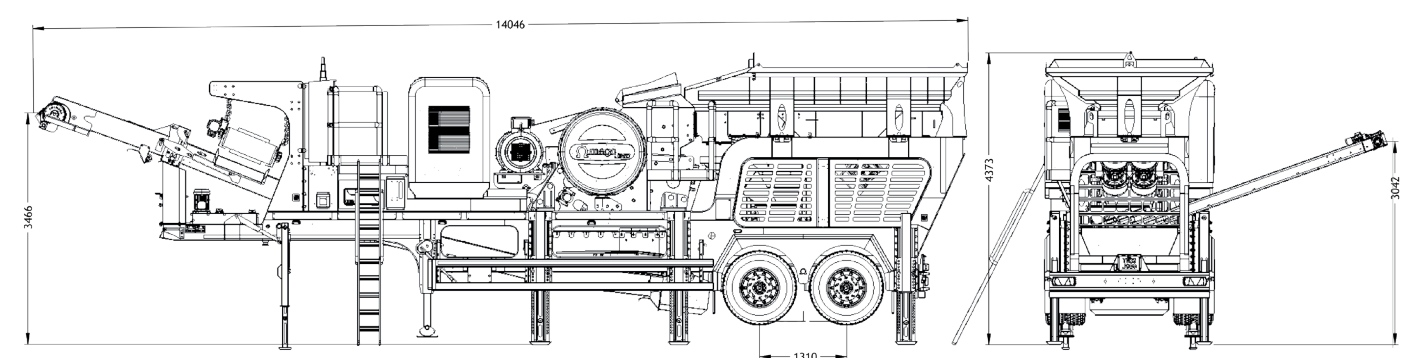

H. 14' 4" / 4,380 mm **W.** 16' 11" / 5,176 mm **L.** 46' 1" / 1,4050 mm **WEIGHT.** 32,000 kg's